




Specification	
Input Voltage	24 V AC
Input Frequency (Hz)	50-60
Life (H)	20,000 Hours
Operating Temperature (°c)	-25 to 50
IP Rating	IP20 / IP65 / IP68
Warranty	3 Years

Physical Data	
Shape	Strip
Colour	Various
Finish	N/A

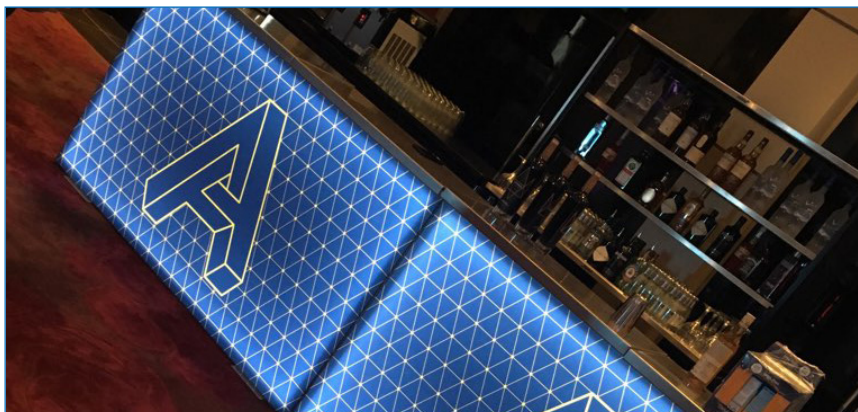

KEY FEATURES

- Suitable for indoor and outdoor
- Cutting or soldering optional
- Tuneable white optional flexible led
- Various colours
- Custom Design on Request

Ordering Information						
PART NUMBER	POWER (W)	LED PER METRE	LUMEN	HEIGHT (MM)	WIDTH (MM)	COLOUR TEMP
PROSTRIP27-120-20/65/68	9.6	120	768	2.4/5.0	8/10	2700
PROSTRIP40-120-20/65/68	9.6	120	883	2.4/5.0	8/10	4000
PROSTRIP60-120-20/65/68	9.6	120	864	2.4/5.0	8/10	6000
PROSTRIPRGB-20/65/68	14.4	60	510	2.4/5.0	12	RGB
PROSTRIPRGB-96-20/65/68	14.4	96	940	2.4/5.0	12	RGB
PROSTRIPRGBWW-20/65/68	14.4	60	861	2.4/5.0	12	RGB (2700)
PROSTRIPRGB-WW-96-20/65/68	14.4	96	940	2.4/5.0	12	RGB (2700)
PROSTRIPRGBW-20/65/68	14.4	60	861	2.4/5.0	12	RGB (4000)
PROSTRIPRG-BW-96-20/65/68	14.4	96	940	2.4/5.0	12	RGB (4000)