

### PRIME FEATURES:

- TRIDONIC DRIVER
- EPISTAR CHIP
- HIGH LUMEN PER WATT
- TWIN AND SINGLE
- SENSOR/ EMERGENCY OPTIONAL
- ELEGANT DESIGN
- IP65



LED NON-CORROSIVE

### APPLICATION

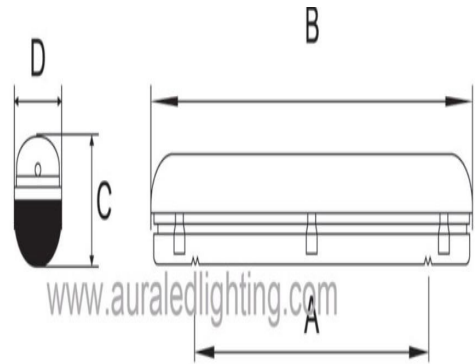


PART NUMBER	DESCRIPTION	POWER [W]	LUMEN	COLOUR TEMPERATURE
AL-NCF4FS/T-20W/40W	4 FT SINGLE /TWIN FITTING	20/40W	2000/4000	4000K
AL-NCF5FS/T-35W/65W	5 FT SINGLE /TWIN FITTING	35/65W	3500/6500	4000K
AL-NCF6FS/T-50W/75W	6 FT SINGLE /TWIN FITTING	50/70	5000/7500	4000K



**WHAT YOU NEED TO KNOW:****SPECIFICATION:**

<b>Input Voltage</b>	<b>220-240 V AC</b>
<b>INPUT FREQUENCY [HZ]</b>	<b>50-60</b>
<b>DRIVER</b>	<b>TRIDONIC</b>
<b>CRI</b>	<b>≥80</b>
<b>LIFE[H]</b>	<b>50,000 HOURS</b>
<b>IP RATING</b>	<b>IP65</b>
<b>OPERATING TEMP° C</b>	<b>-25 TO 50</b>
<b>WARRANTY</b>	<b>5 YEARS</b>

**DIMENSIONS:**

DESCRIPTION	LENGTH W[MM]	WIDTH W[MM]	HEIGHT H[MM]
20W	1270	93	92
40W	1270	140	92
35W	1565	93	92
65W	1565	140	92
50W	1860	93	92
75W	1860	140	92

**PHYSICAL DATA:**

<b>BODY SHAPE</b>	<b>LINEAR</b>
<b>BODY COLOUR</b>	<b>CLEAR</b>
<b>BODY FINISH</b>	<b>LIGHT BROWN</b>
<b>DIFFUSER COLOUR</b>	<b>PRISMATIC/CLEAR</b>
<b>DIFFUSER MATERIAL</b>	<b>POLYCARBONATE</b>

**PHOTOMETRIC DATA**