



## VITRO LED

Recessed LED downlight

### APPLICATIONS

- Corridors and circulation areas
- Toilets

### SPECIFICATION

- Three wattages available:
  - 15W, 1100 lm, 73 l.lm/c.W
  - 20W, 1500 lm, 75 l.lm/c.W
  - 30W, 2300 lm, 77 l.lm/c.W
- CRI >.8
- CCT 4000K


### CONSTRUCTION

- Die-cast aluminium heat-sink
- Opal acrylic diffuser
- Integral moulded driver enclosure

### OPTIONS

- Emergency (maintained 3 hours) version available.

Add suffix /EM

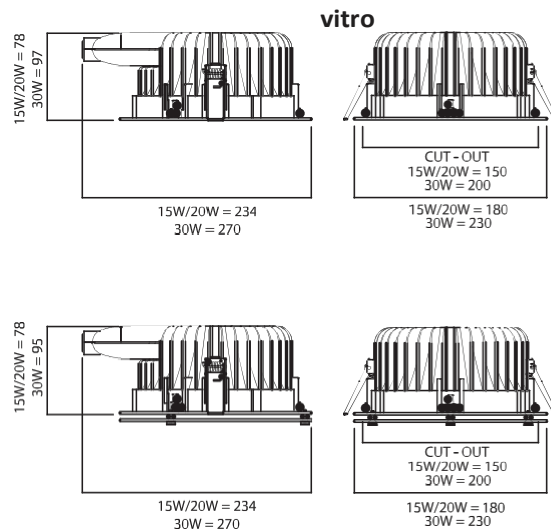

ORDER CODE	DESCRIPTION
AL-VIT15LED-840	LED Downlight 1100 Lumen 4000K
AL-VIT 20LED-840	LED Downlight 1500 Lumen 4000K
AL-VIT 30LED-840	LED Downlight 2300 Lumen 4000K
WITH DROP GLASS	
AL-VIT 15LED-840-DG	LED Downlight 1100 Lumen, with Drop Glass, 4000K
AL-VIT 20LED-840-DG	LED Downlight 1500 Lumen, with Drop Glass, 4000K
AL-VIT 30LED-840-DG	LED Downlight 2300 Lumen, with Drop Glass, 4000K