



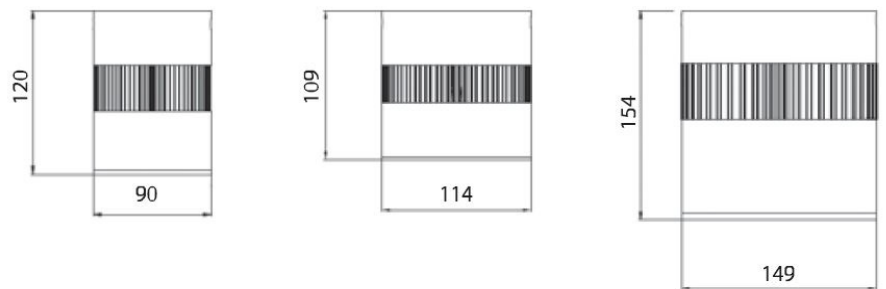

Specification	
Input Voltage	220 -250 AC
Input Frequency (Hz)	50-60
Drivers	INCLUDED
CRI	≥80
Life (H)	50000
Operating Temperature (°c)	-25 to 60
<b>IP Rating</b>	<b>IP40</b>
<b>Warranty</b>	<b>5 Years</b>

Physical Data	
Shape	CYLINDRICAL
Colour	WHITE
Finish	POLYCARBONATE

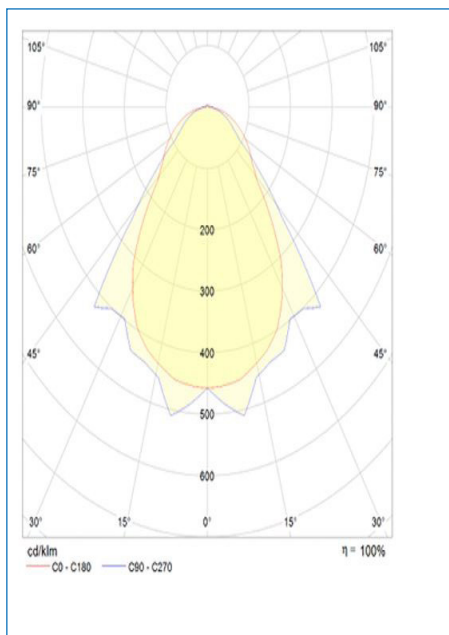

### KEY FEATURES

- Suspended mounted kit available
- Upto 70% of energy savings
- Supplied with mounting bracket
- Osram Driver
- 50000 hours
- Frosted glass diffuser

Ordering Information						
Part Number	Power (W)	Lumen	Cutout (mm)	HEIGHT (mm)	Width (mm)	Colour Temp
AL-SCI10LED-840	10	750	N/A	120	90	4000
AL-SCI20LED-840	20	1500	N/A	109	114	4000
AL-SCI30LED-840	30	2300	N/A	154	149	4000