

ARAO INDOOR LIGHTING

PRIME FEATURES:

- SINGLE AND TWIN DIFFUSER OPTION
- FOR 15-24MM EXPOSED T CEILING
- EMERGENCY AND DIMMING OPTIONAL
- EPISTAR CHIP
- PMMA DIFFUSER
- LOW GLARE



APPLICATION



PART NUMBER	DESCRIPTION	POWER [W]	LUMEN	COLOUR TEMPERATURE
AL-LAN-39-S-LED	39W RECESSED MODULAR-SINGLE	39	3380	5000K
AL-LAN-39-T-LED	39W RECESSED MODULAR-TWIN	39	3490	5000K



LANUGO LED


WHAT YOU NEED TO KNOW:

SPECIFICATION:

Input Voltage	220-250AC
INPUT FREQUENCY[HZ]	50-60
DRIVERS	OSRAM
CRI	≥80
LIFE[H]	50,000 HOURS
OPERATING TEMP	-25 ° TO 45 °
IP RATING	IP40
WARRANTY	5 YEARS

DIMENSIONS:

DESCRIPTION	WIDTH W(MM)	DEEP D(MM)
LANUGO	595	72

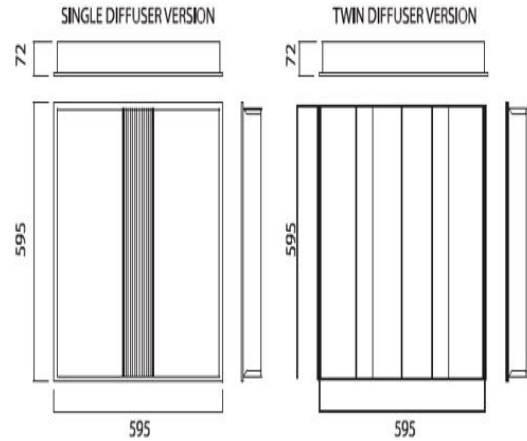

PHYSICAL DATA:

BODY SHAPE	SQUARE
BODY COLOUR	WHITE
BODY FINISH	STEEL
DIFFUSER COLOUR	WHITE
DIFFUSER MATERIAL	METAL GRILL

PHOTOMETRIC:

