

ARAE INDOOR LIGHTING


PRIME FEATURES:

- ROBUST STEEL BODY
- UV STABLE POLYCARBONATE DIFFUSER
- EMERGENCY/ DIMMING/ SENSOR OPTIONAL
- OTHER COLOUR TEMPERATURES OPTIONAL
- 107-120 L/W
- TRIDONIC DRIVER



RETRO LED

APPLICATION



PART NUMBER	DESCRIPTION	POWER [W]	LUMEN	COLOUR TEMPERATURE
AL-RET30/55LED-840	4 FOOT 30/55 W RETRO	30/55	3285/ 6470	4000K
AL-RET40/65LED-840	5 FOOT 40/65 W RETRO	40/65	4650/ 7120	4000K
AL-RET50/75-840	6 FOOT 50/75 W RETRO	50/75	5725/ 8370	4000K




WHAT YOU NEED TO KNOW:

SPECIFICATION:

Input Voltage	220-250AC
INPUT FREQUENCY[HZ]	50-60
DRIVERS	TRIDONIC
CRI	≥80
LIFE[H]	50,000 HOURS
OPERATING TEMP	-25 ° TO 45 °
IP RATING	IP40
WARRANTY	5 YEARS

DIMENSIONS:

DESCRIPTION	LENGTH L(MM)	WIDTH W(MM)	DEEP D(MM)
30/55	1227	61	64
40/65	1527	61	64
50/75	1791	61	64

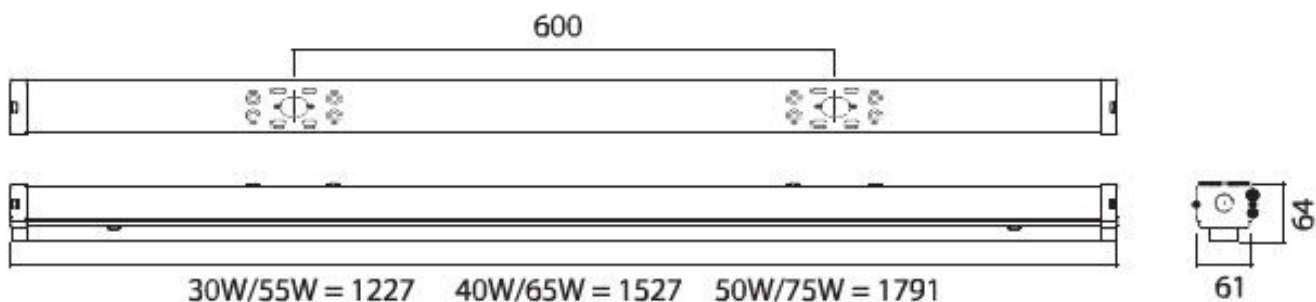

PHYSICAL DATA:

BODY SHAPE	RECTANGULAR
BODY COLOUR	WHITE
BODY FINISH	POLYCARBONATE
DIFFUSER COLOUR	PRISMATIC CLEAR
DIFFUSER MATERIAL	POLYCARBONATE