




Specification	
Input Voltage	220 TO 240 AC
Input Frequency (Hz)	50-60
Drivers	OSRAM
CRI	≥80
Life (H)	50000
Operating Temperature (°c)	-25 to 50
IP Rating	IP40
Warranty	5 Years

Physical Data	
Shape	SQUARE
Colour	WHITE
Finish	POWDER COATED

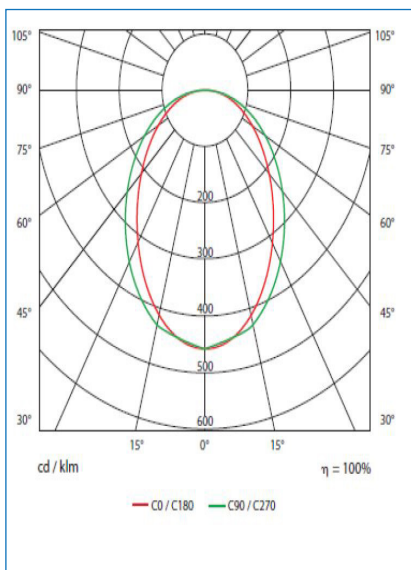

KEY FEATURES

- Emergency/ Dimming Optional
- Robust Steel Body
- Upto 70% of energy savings
- For 15-24MM exposed T Ceiling
- Clear Polycarbonate Side diffuser panels
- PMMA Central controller
- LG Chipset, Direct/Indirect

Ordering Information					
Part Number	Power (W)	Lumen	Length (mm)	Width (mm)	Colour Temp
AL-LUND-40-LED	40	3354	101	595	5000