


17W WALL MOUNT

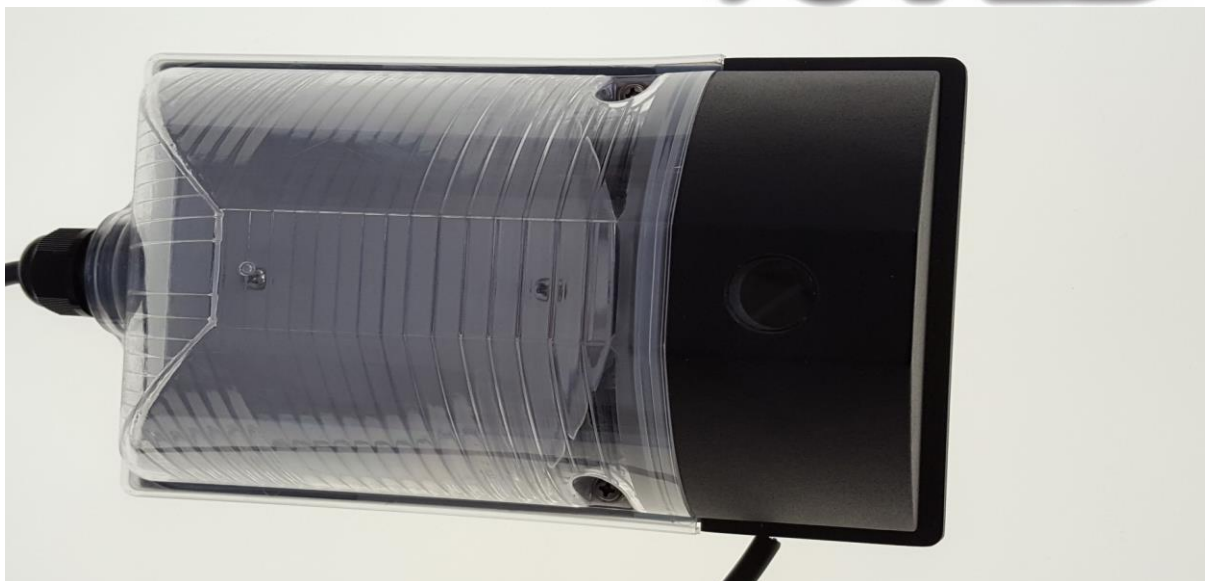


Specifications

- ▶ 5000 k Colour Temperature, Lumen [Lm] 1445-1700
- ▶ Input Voltage [V] 120-277VAC, Output Voltage [V] 30-42VDC
- ▶ Power Factor >0.95
- ▶ Beam Angle 120°, CRI ≥82
- ▶ Lumileds luxeon 3030 LED, Efficiency[lm/W] 85-100lm/W
- ▶ Lifespan (Hrs) ≥50000Hrs
- ▶ Dimensions[mm] L212.94*W139.3*H89.
- ▶ IP 65, Operating Temperature Range -25°C to 65°C
- ▶ 5 Years Warranty

Ordering Information

Order Code	Descriptions
AL-WALLPACK30	30WATT LED WALL PACK COL 5500K



Technical Drawing

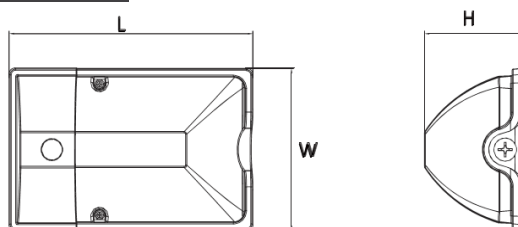

Features

- ▶ Sealed die-casting profile for outdoor applications
- ▶ Consumes 17W to replace 120W Incandescent
- ▶ 25W to replace 50W HID
- ▶ Lumen output from 1600-2200lm
- ▶ Polycarbonate optical lens with UV stabilizers
- ▶ Built-in UL class 2 driver, and 120V/277V photocell
- ▶ UL/CUL listed and DLC qualified

Photo-metrics Data

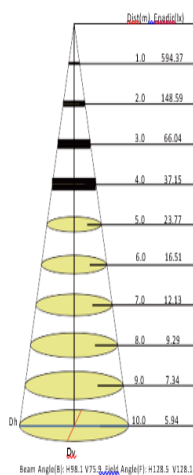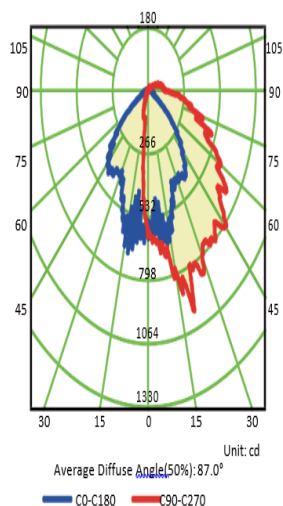

PACKING DRAWING

