

# ARAO INDOOR LIGHTING


## PRIME FEATURES:

- EMERGENCY/ DIMMING OPTIONAL
- ROBUST STEEL BODY
- FOR 15-24MM EXPOSED T CEILING
- EXTRUDED ALUMINIUM HEATSINK ON REAR
- PMMA CENTRAL CONTROLLER
- LG CHIP SET



LUNDI LED

## APPLICATION



PART NUMBER	DESCRIPTION	POWER [W]	LUMEN	COLOUR TEMPERATURE
AL-LUND-40-LED	40 W 600X600 RECESSED MODULAR	40 W	3354	4000K




**WHAT YOU NEED TO KNOW:**

**SPECIFICATION:**

Input Voltage	220-240AC
INPUT FREQUENCY[HZ]	50-60
DRIVERS	OSRAM
CRI	≥80
LIFE[H]	50,000 HOURS
OPERATING TEMP	-25 ° TO 45 °
IP RATING	IP40
WARRANTY	5 YEARS

**DIMENSIONS:**

DESCRIPTION	DEEP	WIDTH
	L(MM)	W(MM)
	105	595

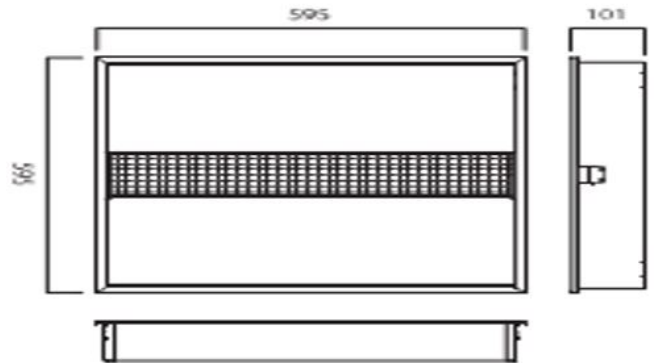

**PHYSICAL DATA:**

BODY SHAPE	SQUARE
BODY COLOUR	WHITE
BODY FINISH	POWDER COATED
DIFFUSER COLOUR	PRISMATIC CLEAR
DIFFUSER MATERIAL	POLYCARBONATE

**PHOTOMETRIC:**

