




Specification	
Input Voltage	120-277 AC
Input Frequency (Hz)	50-60
Drivers	INCLUDED
CRI	≥80
Life (H)	50000
Operating Temperature (°c)	-40 to 40
IP Rating	IP66
Warranty	5 Years

Physical Data	
Shape	BOLLARD
Colour	BLACK
Finish	POWDERCOAT FINISH

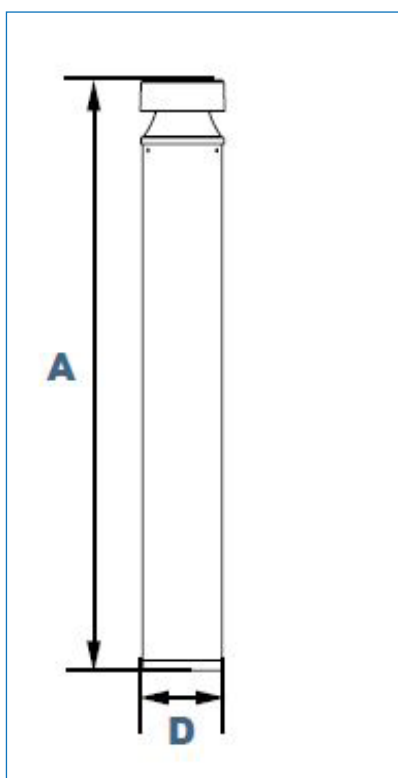

360 Distribution



180 Shield

KEY FEATURES

- 360° Light distribution or 180° shield
- Upto 70% of energy savings
- 50,000 Hours life, IP66
- Flush mounting base and vandal-resistant screws
- Clear polycarbonate vandal-resistant lens
- Mounting kit with 200mm anchor bolts

Ordering Information					
Part Number	Power (W)	Lumen	Diameter (D) (mm)	Height (A) (mm)	Colour Temp
AL-B5360-17W	17	674	120	865	4000
AL-B5180-16W	16	488	120	865	4000