


INDOOR • LED NON-CORROSIVE



Specification	
Input Voltage	220 TO 240 AC
Input Frequency (Hz)	50-60
Drivers	OSRAM
CRI	≥80
Life (H)	50000
Operating Temperature (°c)	-25 to 35
IP Rating	IP65
Warranty	5 Years

Physical Data	
Shape	LINEAR
Colour	WHITE
Finish	Polycarbonate

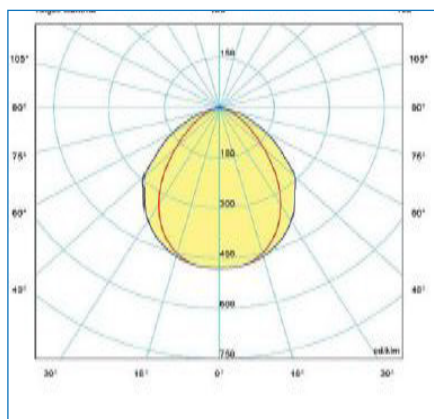

## KEY FEATURES

- Upto 120 lm/w
- Upto 70% of energy savings
- Ultra low wattages
- Dimmable, Sensor and Emergency Optional
- Adjustable Wattages
- Osram Driver
- Epistar Chip

Ordering Information						
Part Number	Power (W)	Lumen	Depth (mm)	Length (mm)	Width (mm)	Colour Temp
AL-NCF2FS/T-8W/15W	8/15	960/1800	92	660	93/140	4000
AL-NCF4FS/T-15W/25W	15/25	1800/3000	92	1270	93/140	4000
AL-NCF5FS/T-20W/35W	20/35	2400/4200	92	1565	93/140	4000
AL-NCF6FS/T-25W/45W	25/45	3000/5400	92	1835	93/140	4000

IP65

WARRANTY: 5 YEARS

