




Specification	
Input Voltage	110 -120 AC
Input Frequency (Hz)	50-60
Drivers	INCLUDED
Life (H)	50000
Operating Temperature (°c)	-40 to 50
IP Rating	IP67 OR IP68
<b>Warranty</b>	<b>5 Years</b>

Physical Data	
Shape	ROUND/SQUARE
Colour	STAINLESS STEEL
Finish	STAINLESS STEEL

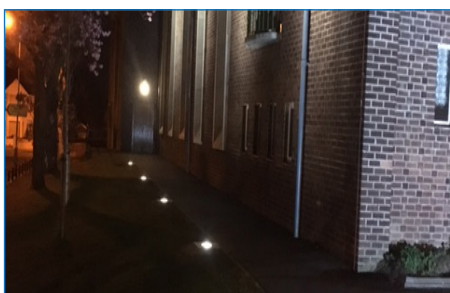

### KEY FEATURES

- Beam Angle optional on request
- Upto 70% of energy savings
- Bespoke Flex Available
- Vandal Resistant Screw, Induction LED
- IP67 & IP68 (24VOLTS), Stainless 316L

Ordering Information						
Part Number	Power (W)	Lumen	Depth (mm)	Cut-Out (mm)	O/Dia (mm)	Colour Temp
AL-ILL-3-WW/NW	3	255	75	55	70	3000/4000
AL-ILL-6-WW/NW	6	450	155	115	129	3000/4000
AL-ILL-9-WW/NW	9	810	130	185	202	3000/4000
AL-ILL-18-WW/NW	18	1530	110	215	227	3000/4000
AL-ILL-18-WW/NW-AGL	18	1530	110	215	236	3000/4000