



Microwave Sensor

ORBIS LED

IP40 circular LED fitting
for surface mounting

APPLICATIONS

- Corridors
- Foyers
- General circulation areas

SPECIFICATION


- 22W, 2200 lm, 104 l.lm/c.W
- CRI >.8
- CCT 5000K
- Osram driver
- SMD 2835 LED chips

CONSTRUCTION

- Metal base with white powder coat or chrome plated finish
- Opal acrylic diffuser
- Steel geartray

OPTIONS

- Also available in CCT 3500K
- Emergency (maintained 3 hours) version available. Add suffix /EM
- Available with microwave sensor. Add suffix /MW
- Corridor function available. Add suffix /CF
- Higher lumen package available

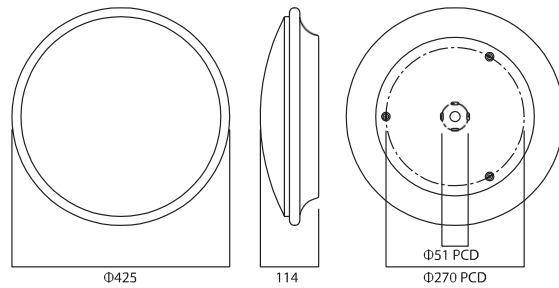

| ORDER CODE | DESCRIPTION |
|---------------------|---|
| AL-ORBLED22-WO-850K | IP40 LED Bulkhead 22W White/Opal - 5000K |
| AL-ORBLED22-CO-850K | IP40 LED Bulkhead 22W Chrome/Opal - 5000K |