
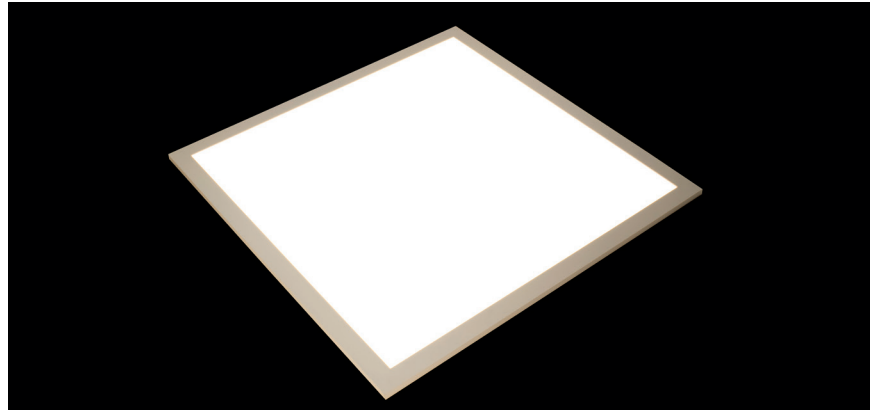


ARCHITECTURAL • PRO ULTRA PANEL

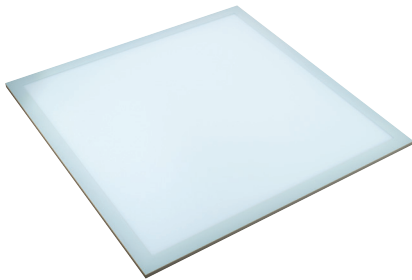

Specification	
Input Voltage (V)	150-250
Input Frequency (Hz)	50-60
Drivers	BOKE/TRIDONIC
CRI (Ra)	≥80
Life (H)	54,000 (L70/B10)
Operating Temperature (°c)	-25 to +50
IP Rating	IP40
Warranty (yrs)	5

KEY FEATURES

- Ultra low power from 18w
- Upto 125l/w
- Upto 70% of energy savings
- UGR 19
- Anti Glare Limiting Direct Glare from luminaires
- Epistar New Gen Chipset
- Boke Driver
- Slim aluminium edge frame
- Dimmable and Emergency Optional
- Adjustable Wattages
- TP(b) fire rated diffuser
- L70 54000 Hrs Lifetime

Physical Data	
Shape	SQUARE/ RECTANGLULAR
Colour	WHITE
Finish	ALUMINIUM WITH MICRO PRISM DIFFUSER

Ordering Information						
Part Number	Power (W)	Lumen (lm)	Depth (mm)	Height (mm)	Width (mm)	Colour (K)
AL-PROM-18-4K (600X600)	18	2250	11	595	595	4000
AL-PROM-24-4K (600X600)	24	3000	11	595	595	4000
AL-PROM-30-4K (600X600)	30	3750	11	595	595	4000
AL-PROM-36-4K (600X600)	36	4500	11	595	595	4000
AL-PROM-48-4K (1200X600)	48	6000	11	1195	1195	4000
AL-PROM-60-4K (1200X600)	60	7500	11	1195	1195	4000

IP40

WARRANTY: 5 YEARS (1 YEAR ONSITE)

