




Specification	
Input Voltage	120-277 AC
Input Frequency (Hz)	50-60
Drivers	INCLUDED
CRI	≥80
Life (H)	50000
Operating Temperature (°c)	-40 to 40
<b>IP Rating</b>	<b>IP65</b>
<b>Warranty</b>	<b>5 Years</b>

Physical Data	
Shape	BOLLARD
Colour	BLACK
Finish	POWEDER COAT FINISH

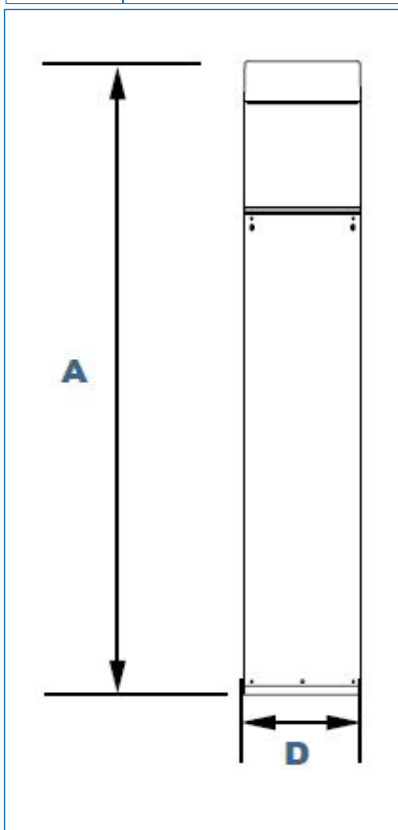

### KEY FEATURES

- Specially designed aluminium cone reflector
- Upto 70% of energy savings
- 50,000 Hours life, IP65
- Flush mounting base and vandal-resistant screws
- Clear polycarbonate vandal-resistant lens
- Mounting kit with 200mm anchor bolts

### Ordering Information

Part Number	Power (W)	Lumen	Diameter (D) (mm)	Height (A) (mm)	Colour Temp
AL-B6-15W	15	1519	178	1057	5000

**IP65**

**WARRANTY: 5 YEARS**

