



- **SUN** LED ceiling recessed for 600x600 grid ceiling
- Microprism optic: illumination to current standard EN 12464-1 UGR<19 LG7, LG5, LG3
- Matt opal optic for enhanced light transmission and perfect uniform illuminations.
- The balanced contrast creates a pleasant atmosphere, good quality lit environment
- It eliminates dark ceilings
- Fits exposed T-bar 15 or 25mm
- Housing fabricated from cold-rolled steel
- High-reflectance powder coated matt white fully recessed body with no protrusion below ceiling grid line.
- Tridonic LED modules
- Tridonic LED driver
- ECA and L2 compliant
- L90/60,000hrs B10
- 3 Step MacAdam Ellipse
- 73D

Options

- ~~GLPPDEOH~~
- ~~KRHPHU~~
- ~~6HOIWH~~
- ~~7ECHOH/LWH/RGHEWKD~~
- ~~JKDOLU~~





Add suffix to catalogue number:

DD: DALI. **EM3:** Emergency version. **STE:** Self test emergency
DE3: DALI emergency. **MP:** Micro prism. **MO:** Matt opal.
AH: Air handling.


Please note that with the continuous rapid development in lighting technology, specification values may change. Contact our technical department for details. We reserve the right to amend or change details without prior notification. All performance data is taken at an ambient temperature of +25°C. Lumens and connected system load are subject to an initial tolerance of up to +/- 10%.

SPECIFICATION

1R	7HPS	SHHUL	/LIH	7RWDO	FWHG	/LUH
		5	/	OLUHG	/RDG7RWDO	HP
			KU	/	:DWW	(ILFDF)
				OP	WF	OP:

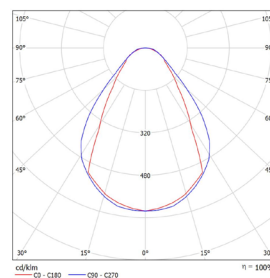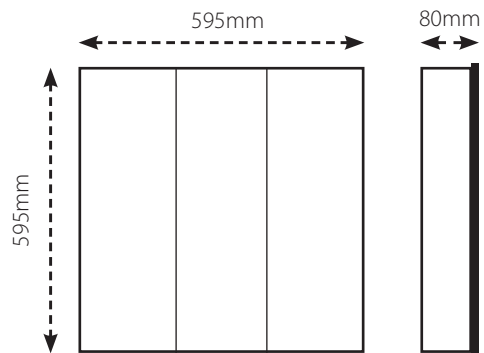

Micro prism



Opal